


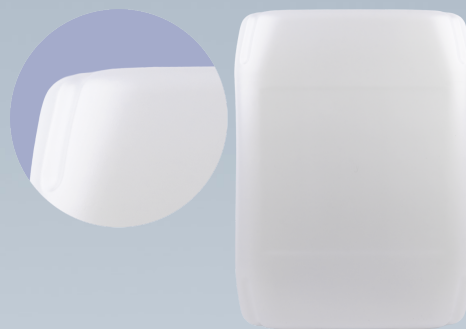

PRODUCT TECHNICAL DATA SHEET

Canister K-20N2

BASIC DATA

Nominal Capacity:	20 L	Application:	industrial chemistry
Thread Standards:	Ø 52		household chemistry
Material Options:	HDPE ≥ 97% / dye ≤ 3%		agro sector

AVAILABLE VARIANTS

Parameter	Value	Certificates	Visibility Strip:	available
Weight:	740 g	UN (II i III, to 1,3 g/cm³)	Touch Sign:	available
	800/830 g	UN (II i III, to 1,3 g/cm³)	IML Label:	not available
	900/940 g	UN (II i III, to 1,3 g/cm³)	Printing:	not available
	960 g	UN (II i III, to 1,3 g/cm³)	Customer Logo:	available
Colors:	white, colorless, other to be agreed with our employee		Seal Type:	breaking teeth
Seal Type:	foam-PE		Thread Type:	52M, Suwary

DIMENSIONS

Parameter	Value	Notes	Parameter	Value	Notes
Weight:	720/740 g	+30 g	Length:	288 mm	±4 mm
	800 g	+30 g	Width:	256 mm	±4 mm
	830 g	-20 g	Height:	376 mm	±6 mm
	900 g	+30 g			
	940/960 g	+30 g			
Label Area:	180(H) x 215(W) mm				

AVAILABLE CLOSURES

Suwary 52M: 9-11 Nm


PALLETIZATION AND STORAGE - EMPTY PACKAGES

Packaging System No.:	sT12P72 / sW8P160	Pallet:	1200x800 mm
Label Content:	manufacturer's name, production date	Spacers:	cardboard trays/bags
	product type, product quantity (pcs)	Pallet Module:	6 / 10 layers, stretch foil or bags
	batch number, quality mark	Quantity per layer:	12 / 16 pcs
Storage:	protect against sunlight and weather conditions	Quantity per pallet:	72 / 160 pcs
	min. 1m away from heat sources	Pallet Weight:	maks. 90 / 200 kg
	ambient temperature up to 40°C	Pallet Height:	2,5 / 2,8 m
Shelf Life:	12 months from delivery	Seasoning before Filling:	min. 10 h at temp. 16-25°C
Filling Temperature:	max. 40°C		

TRANSPORT - EMPTY PACKAGES

Transport:	protection against rain, deformation, contamination and shifting
Warning:	additional loading of transport modules is not permitted

Layer Arrangement:

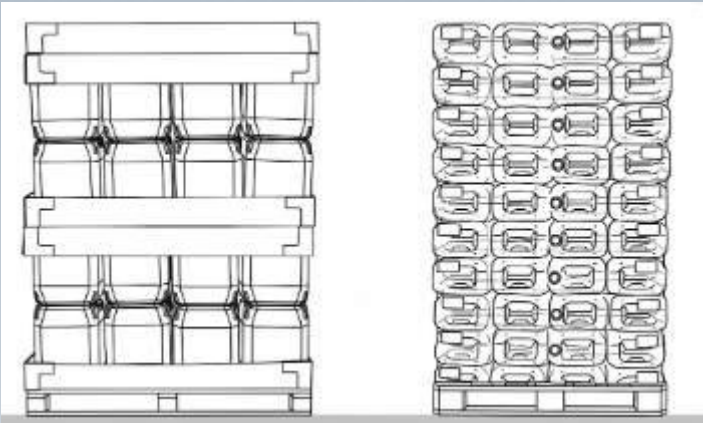

STORAGE AND TRANSPORT - FILLED PACKAGING

Completing:	Max. 2 layers, recommended wrapping with stretch foil and spacers between layers
Storage:	in covered rooms, on flat surfaces / shelves
	temperature 40 °C, stacking pallet units is not recommended
	protect against sun and weather conditions, keep a distance of at least 1 m from heat sources
Transport:	stacking pallet units is not recommended
	protection against precipitation, deformation, dirt and movement

ADDITIONAL INFORMATION

- The obligation to validate and confirm the compatibility of the product in the technological process, the logistics chain and in terms of compliance with the filled medium rests with the recipient.

Edition: 2
Modification Date: 10.04.2026